


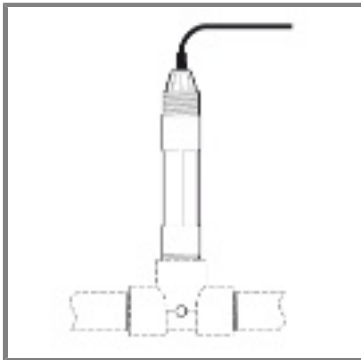

Pretočni enopalčni T-kos iz CPVC-ja za pH-senzor

Številka izdelka: MH334N4NZ

EUR Cena: Kontakt

Datum pošiljanja ni prikazan

Namestitvena oprema za diferencialne pH sc-senzorje. Pretočno držalo vključuje standardni enopalčni T-kos iz CPVC-ja.

Diferencialno elektrodo merjenje

This field-proven technique uses three electrodes instead of the two normally used in conventional pH sensors. Process and reference electrodes measure the pH differentially with respect to a third ground electrode. The end result is unsurpassed measureme

Različni načini namestitve

Sensors are available in four mounting stylesΓÇöconvertible, insertion, immersion, and sanitary.

Zamenljivi solni mostiček/zaščita

The unique, replaceable salt bridge holds an extraordinary volume of buffer to extend the working life of the sensor by protecting the reference electrode from harsh process conditions. The salt bridge simply threads onto the end of the sensor if replacem

Vgrajeni inkapsulirani predojačevalnik

Encapsulated construction protects the sensorΓÇÖs built-in preamp from moisture and humidity, ensuring reliable sensor operation. The preamp in the pH analog sensor produces a strong signal, enabling the sensor to be located up to 1000 m (3280 ft.) from

Ohišje iz vzdržljivih materialov

Both the digital and analog pH and ORP differential sensors feature a durable PEEKΓ« body for chemical compatibility with most process solutions. For less aggressive solutions, Hach offers a PPSΓ« sensor in a convertible style for pH and ORP measurement

Specifikacije

Material:	CPVC
Materiali v stiku z vodo:	CPVC
Način montaže:	Pretočni T-kos
Procesni priključek:	1 " Notranji navoj NPT