


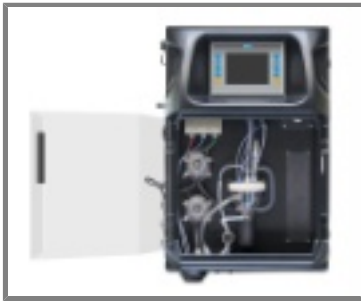

EZ3505 Chloride Analyser

Številka izdelka: EZ3505.XXXXXXXXXX
EUR Cena: Kontakt

Online ion-selective Chloride measurements with standard addition for industrial applications

ISE technology for complex water matrices

The EZ3500 Series are used for water monitoring applications where ion-selective electrodes are the preferred analytical technique, but the water matrix is complex. Standard addition helps minimise matrix interferences that otherwise might contribute to the output signal of the electrode.

Discontinuous, automatic standard addition

The EZ3500 Series run discontinuous measurements with careful addition of a known standard in an analysis vessel. Discontinuous ISE analysis enhances control over the potentiometry, eliminates cross-contamination between cycles and reduces overall reagent consumption.

The EZ3500 Series combine unique technology with a set of analysis, control and communication features in an industrial analyser mainframe designed for the highest performance:

- Smart automatic features
- Control and communication via industrial panel PC
- Analogue and digital output options
- Multiple stream analysis (up to 8 streams)

There are many additional options available. Please contact Hach for more details.

Specifikacije

Alarm:	1x malfunctioning, 4x user-configurable, max. 24 VDC/0.5 A, potential free contacts
Analogni izhodi:	Active 4 - 20 mA max. 500 Ohm load, standard 1, max. 8 (option)
Avtomatsko čiščenje:	Da
Certificiranje:	CE compliant / UL certified
Demineralised water:	For rinsing
Digital outputs:	Optional: Modbus (TCP/IP, RS485)
Dimenzija (v x š x g):	690 mm x 465 mm x 330 mm
Earth connection:	Dry and clean earth pole with low impedance (< 1 Ohm) using an earth cable of > 2.5 mm ²

Garancija:	24 mesecev
Ime metode:	Ionselective (standard addition)
Instrument air:	Dry and oil free according to ISA-S7.0.01-1996 quality standard for instrument air
Interference :	Bromide, sulphide, iodide, cyanide ions may interfere. Mercury must be absent. Ammonia and thiosulphate may interfere. Fats, oil, proteins, surfactants and tar.
Kakovost vzorca:	Maximum particle size 100 µm, < 0.1 g/L; Turbidity < 50 NTU
Kiveta za vzorec:	8 minutes
Material:	Hinged part: Thermoform ABS, door: PMMA
	Wall section: Galvanised steel, powder coated
Meja zaznavanja:	10 mg/L
Merilna metoda:	Discontinuous measurement by combined ion-selective electrode with standard addition
Merilno območje:	50 - 1000 mg/L Cl ⁻
	Optional:
	10 - 250 mg/L Cl ⁻
	25 - 500 mg/L Cl ⁻
Moč:	100 - 240 VAC, 50/60 Hz
	Max. power consumption: 120 VA
Model:	EZ3505
Način premora:	100 - 240 VAC, 50/60 Hz
Odvod:	Atmospheric pressure, vented, min. Ø 32 mm
Parameter:	Chloride
Precision:	Better than 2% full scale range for standard test solutions
Pretok vzorca:	100 - 300 mL/min
Razred zaščite:	Protection class: Analyser cabinet: IP44 / Panel PC: IP65
Reagent Requirements:	Keep between 10 - 30 °C
Št. vzorca:	1, 2, 4 or 8
Temperatura okolja:	10 - 30 °C ±4 °C deviation at 5 - 95% relative humidity (non-condensing)
Temperatura vzorca:	10 - 30 °C
Teža:	25 kg
Umeritev:	Automatic, 2-point; frequency freely programmable
Validation:	Automatic; frequency freely programmable
Vsebina paketa:	EZ3505 Chloride Analyser, Instruction Manual, 1 x Double Bit Door Key, 1 x Mounting Brackets, 1 x ISE Electrode and Chloride Electrode, combined, and 2 x empty 5L Reagent Containers with Fittings (for Buffer and Standard Cl Solution)
Vzorec: tlak:	By external overflow vessel

Vsebina paketa

EZ3505 Chloride Analyser, Instruction Manual, 1 x Double Bit Door Key, 1 x Mounting Brackets, 1 x ISE Electrode and Chloride Electrode, combined, and 2 x empty 5L Reagent Containers with Fittings (for Buffer and Standard Cl Solution)